

WW4 Effluent Filter



Protects drainfield components by screening effluent in residential or commercial applications with flows up to 4,000 GPD per filter




Zoeller Family of Water Solutions™

Copyright Zoeller Co. All rights reserved.


WW4 Effluent Filter

Features

- Rated for 4,000 gpd
- Can be clustered together for higher flow applications
- 528 linear feet of 1/16" filtration
- Attaches to 4" SCH 40 or SDR 35 PVC outlet pipe
- Easy to install and maintain in new or existing septic tanks
- Integral bypass protection screen
- Lifetime warranty
- Alarms and filter socks available

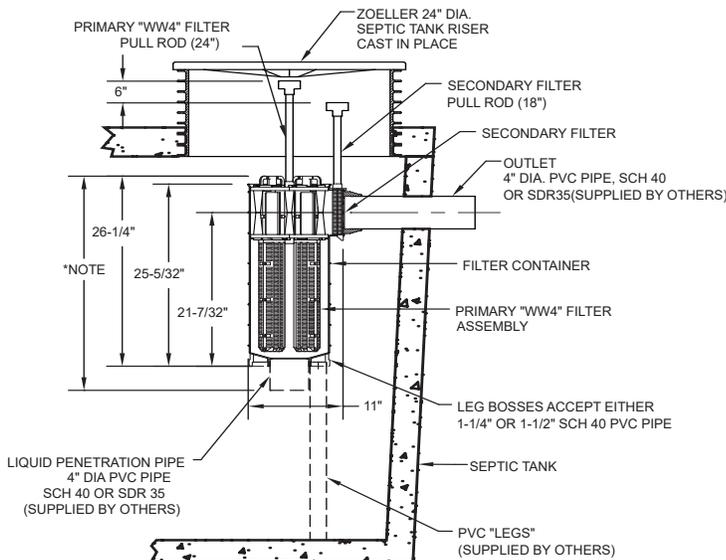

*NOTE: STATE AND LOCAL PLUMBING CODES MAY REQUIRE A SPECIFIC LIQUID PENETRATION. FOR EXAMPLE, 25% - 40% INTO THE LIQUID DEPTH OR 9" OFF THE TANK BOTTOM.

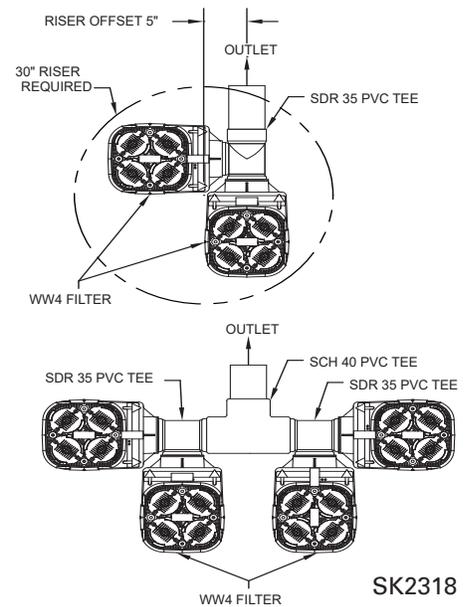

Part Number	Description
5000-0007	WW4 effluent filter
5000-0010	1/32" filter sock for WW4
153240	Primary filter cartridge assembly
153241	Secondary screen
91104-0001	A-Pak® Outdoor/115V/1Ph/15ft float
5090-0014	Alarm bracket assembly

CL1045
1223
Supersedes
1023