

Heavy Duty Series



72 HD,
3" discharge

X72 HD,
4" discharge

72 HD & X72 HD, 10 & 15 HP
Horizontal Flanged Discharge 3450 RPM

ZOELLER 
ENGINEERED PRODUCTS

TRUSTED. TESTED. TOUGH.®

zoellerengineered.com



72 HD & X72 HD, 10 & 15 HP

Horizontal Flanged Discharge 3450 RPM

FEATURES*

- 200, 230, 460 & 575 Volt 3 phase
- 3" or 4" ANSI flange horizontal discharge
- Cutting plate decreases solids to less than 1/4"
- Vortex impeller
- 3450 RPM
- Durable, epoxy coated cast iron construction
- Oil filled motor
- Dual mechanical shaft seal: Upper - Carbon Ceramic, Lower - Silicon Carbide/Silicon Carbide
- Buna-N elastomers
- Thermal sensor and moisture detection
- 304 Stainless steel hardware
- 100% computerized water tested


OPTIONS*

- Seal upgrades
- Additional cord lengths
- Viton elastomers
- Trimmed impeller
- Certified performance audits
- Explosion proof motors

APPLICATIONS:

- Sewage lift stations
- Housing developments
- Pressure sewers
- Pumping stations

*consult tech data sheet for specific technical information

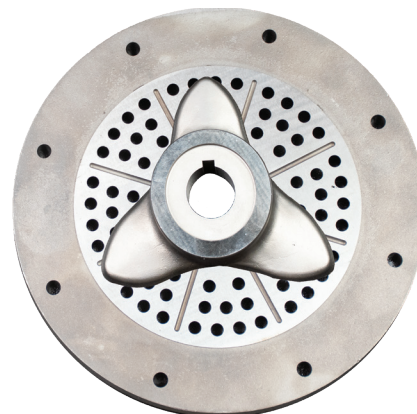

Tech Data Sheets	
72 HD	ZM3316
X72 HD	ZM3483