

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 Tel: (502) 778-2731 • 1 (800) 928-PUMP

Visit our website:
 zoellerengineered.com


Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



71 & 72 HD SERIES MYERS RAIL ADAPTERS


Rail Adapter	Pump	Rail System Discharge
6039-0071	71 HD Series	2-1/2" Horz
6039-0126	72 HD Series	2-1/2" Horz

INSTALLATION INSTRUCTIONS

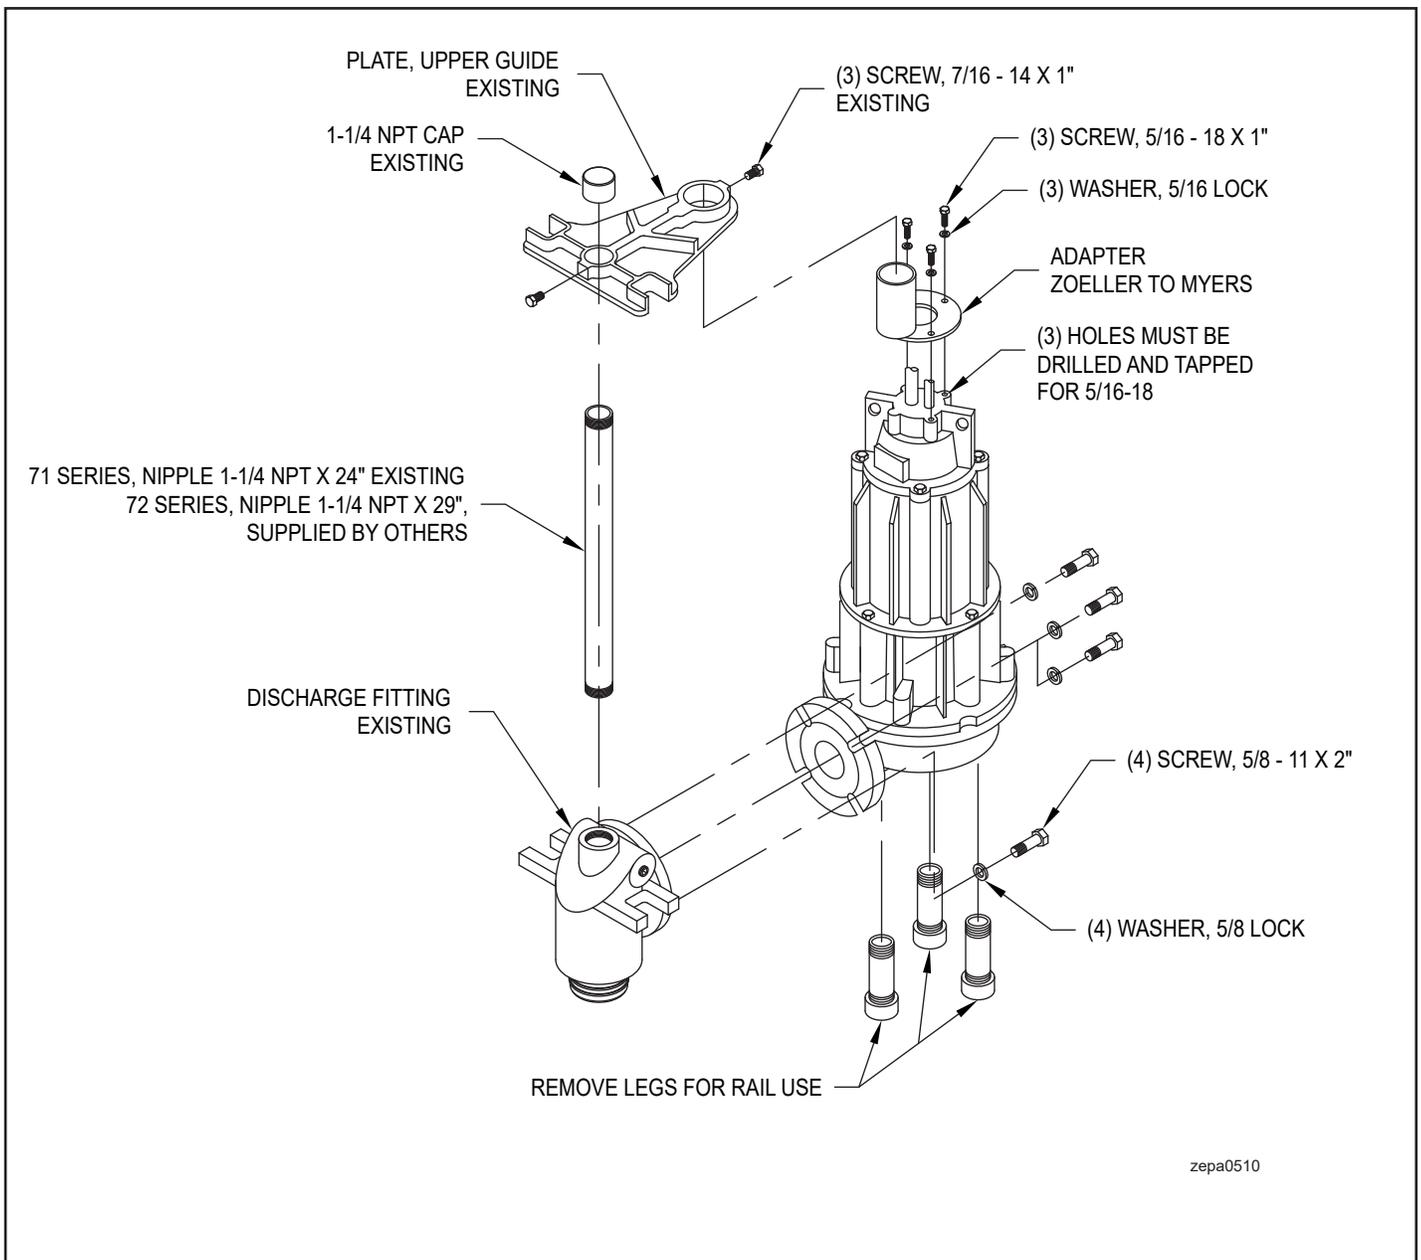

zepa0510

**10-0381 MYERS WA/WAL RAIL ADAPTER
FOR 2 HP GRINDER PUMPS
INSTALLATION INSTRUCTIONS**

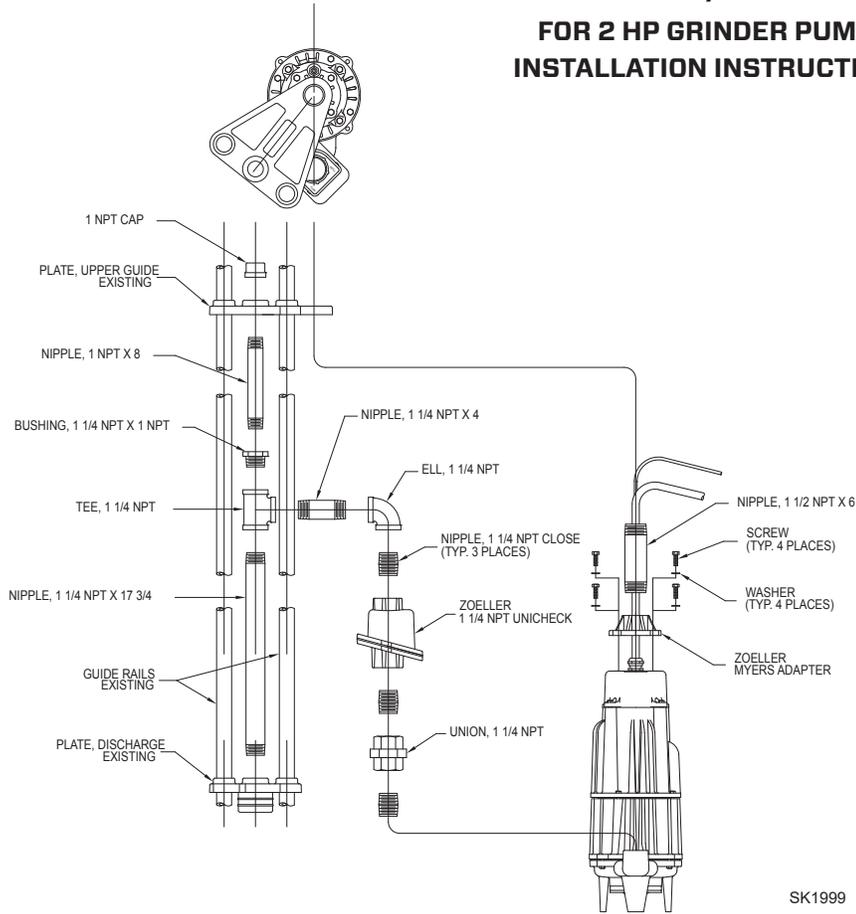

SK1999

For your protection, always shut off the main power breaker and then disconnect the pump. Make sure you are wearing insulated protective sole shoes and not standing in water.


Pump upper guide and discharge plate are Myers castings and must be removed from old pump/piping to be reused.

1. Assemble 1-1/2" NPT x 6" nipple to Myers adapter.
2. Pull large power cord through adapter and nipple assembly.
3. Secure assembly to pump using supplied screws and washers.
4. Pull large power cord through upper guide bracket. Attach bracket with a set screw to the 1-1/2" nipple. Bracket may need to be repositioned vertically when piping is completed.
5. Plumb remaining piping using sketch provided as a reference. Be sure to use sealant on all threaded connections.

**HYDROMATIC HYDRO RAIL ADAPTER
FOR 2 HP GRINDER PUMPS
INSTALLATION INSTRUCTIONS**

No extra charge to order pump with special retrofit pump housing.

Apply Loctite Sealant supplied to bolt threads

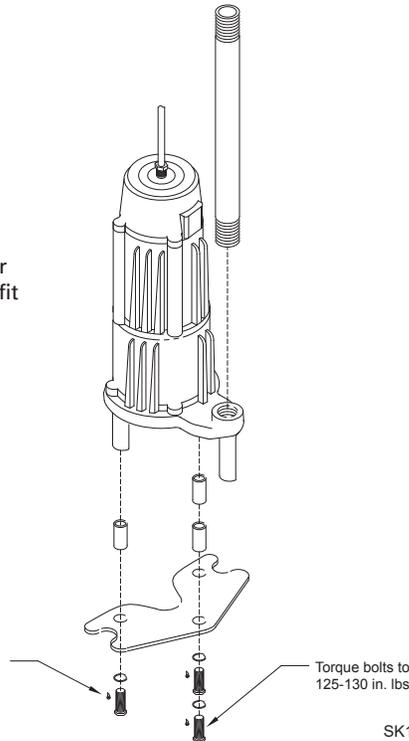

SK1896