

 **APak**[®]
Outdoor Alarm



High-Water Alarm

Clear & convenient communication
with extra features built-in for optimal protection




APak® Outdoor High-Water Alarm

NEMA 4X Enclosure
120 VAC, 50/60 Hz

85 dB @ 10' audible "high water" horn activates during high water event.

Alarm TEST and SILENCE toggle switch for both audible and visual alarm. Also serves as reset for LED after high water event.

Green LED - Zoeller icon - power indicator

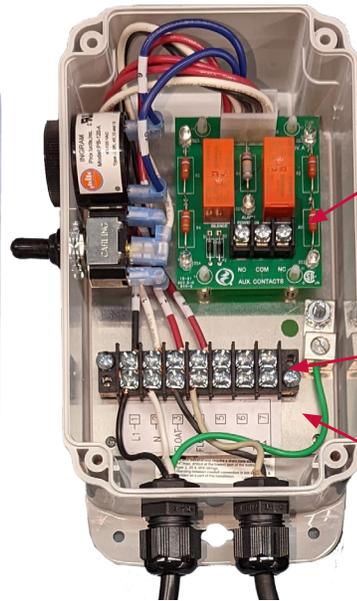

Auxiliary output (dry contacts) for connection to additional alarm equipment, security system, building automation, or input of Z Control® device. 5 amps max, 120 VAC.

Added terminals for optional pump power meet NEC standards for junction boxes. 20 amps, 120/230 VAC.

Ample room for field wiring.



Features

- High visibility red perimeter alarm LEDs.
- High water will trigger horn and red alarm LEDs. Audible alarm horn can be silenced. If water level recedes, alarm will stop on its own, with LED alarm indicator remaining on until reset.
- Proper torque on 4 screws (.45 Nm or 4 in-lbs) provides watertight seal.
- Designed and assembled by Zoeller.
- 5 year limited warranty.
- Item 91104-0001 includes alarm with field installed 15' switch
- Item 91104-0002 includes alarm with pre-installed 6' power cord and 20' switch (shown below)

91104-0001 comes with alarm with a field installed 15' switch.



91104-0002 comes with a pre-installed 6' power cord and 20' switch.

